


دراپور موتور BLDC با سنسور اثر هال
SENSORED BLDC MOTOR DRIVER



BLDC DRIVER (BL-4825) SPECIFICATIONS				
CHARACTERISTICS	MIN.	NOM.	MAX.	UNIT
OUTPUT POWER	-	1000	1200	WATT
INPUT VOLTAGE	18	-	48	V
CURRENT	-	20	25	A
OVER VOLTAGE PROTECTION	49.5	50	50.5	V
UNDER VOLTAGE PROTECTION	15.5	16	16.5	V
OVER LOAD PROTECTION	26.5	27	27.5	A
INTERNAL FUSE	-	30	32	A
SPEED CONTROL (PWM)	10	-	90	%
DIMENSIONS (L x W x H)	15 x 9 x 5.5			Cm

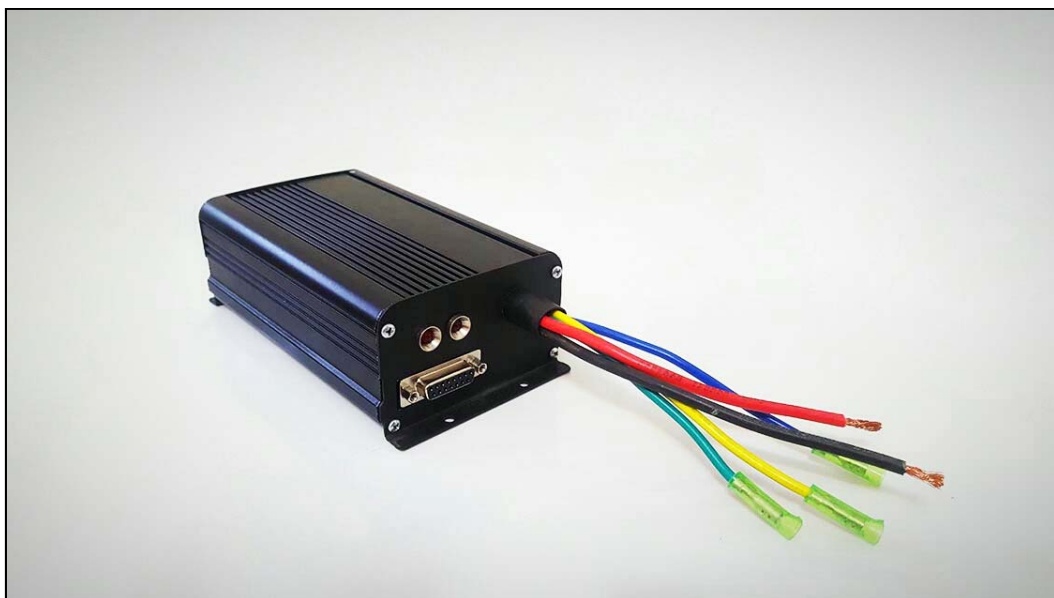

BL-4825 I/O	
ENABLE DRIVER	ON/OFF SWITCH
SPEED CONTROL	1. ANALOG 2. SELECTOR 3. FREQUENCY
DIRECTION	1. CW 2. CCW
OUTPUT ALARM	NPN TRANSISTOR
LED ALARM	OVER VOLTAGE, UNDER VOLTAGE AND OVER CURRENT INDICATOR
FEEDBACK CONTROL	HALL EFFECT SENSORS

- امکان سفارشی سازی مطابق با درخواست مشتری
- یک سال ضمانت و ده سال خدمات پس از فروش
- ساخت ایران